


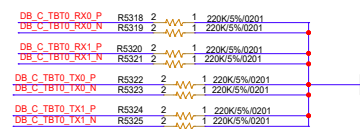
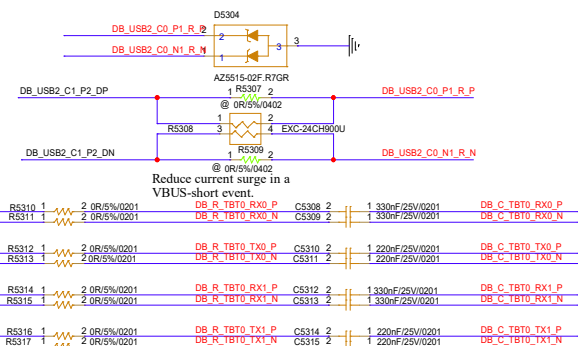
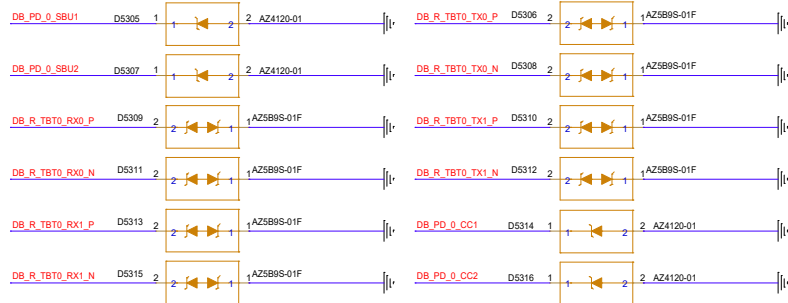
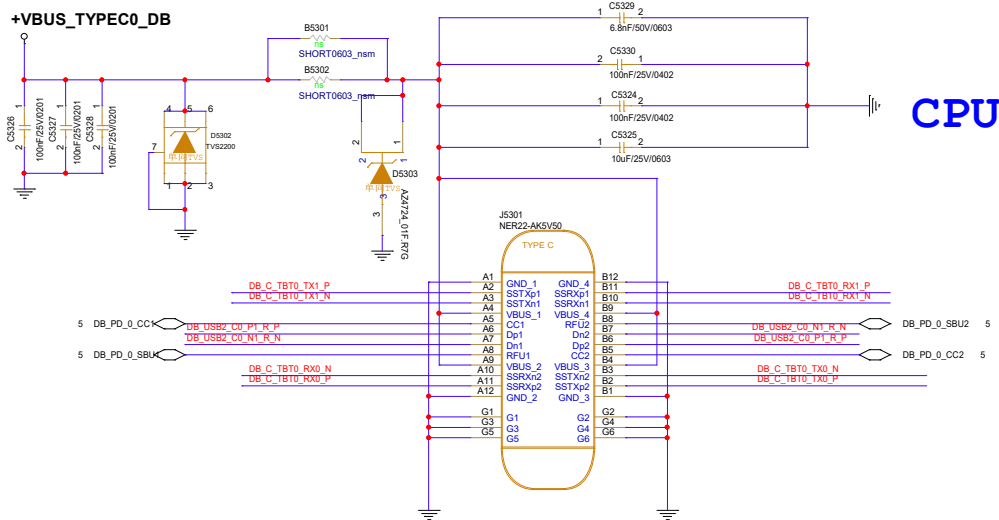


+VBUS_TYPEC0_DB

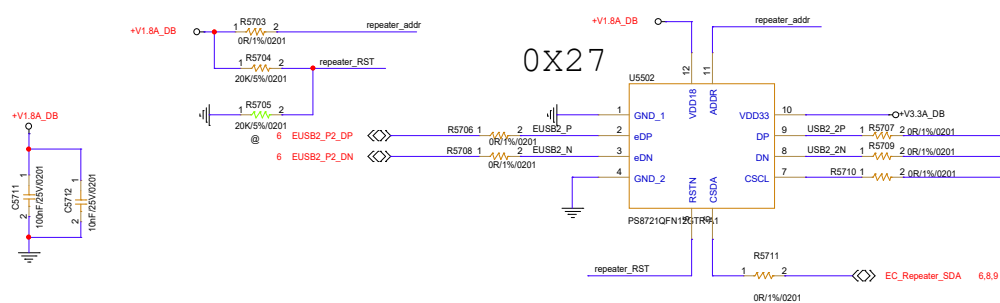

Bleeding resistors SSRX/SSTX - must be placed near USBC connector if 330nF cap is being used. Otherwise de-populate

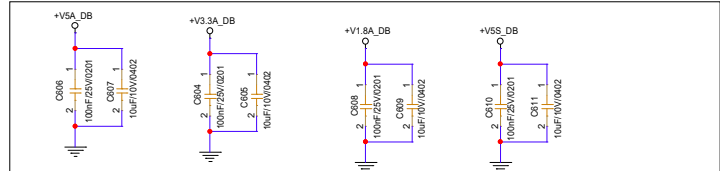

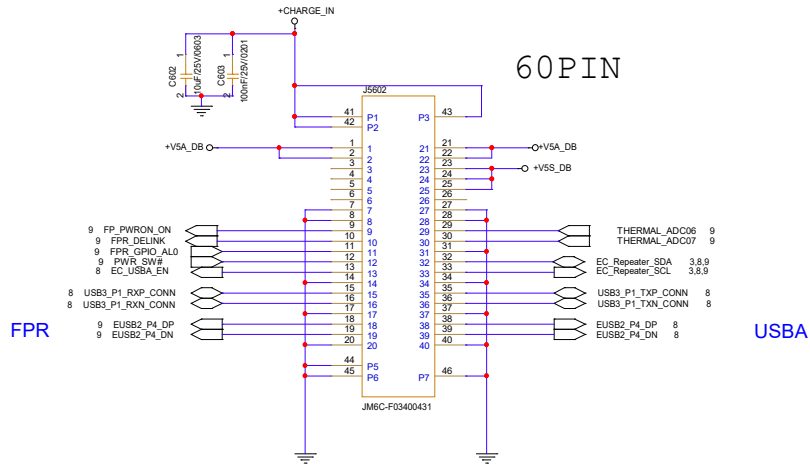

靠近CONN放，0.1优先靠近

