





- * Data bits can be swapped within the byte lane to ease routing.
- * Address/Command/Control/Clock routing must be Fly-By in byte order 0, 1, 2, 3 ECC, 4, 5, 6, 7.

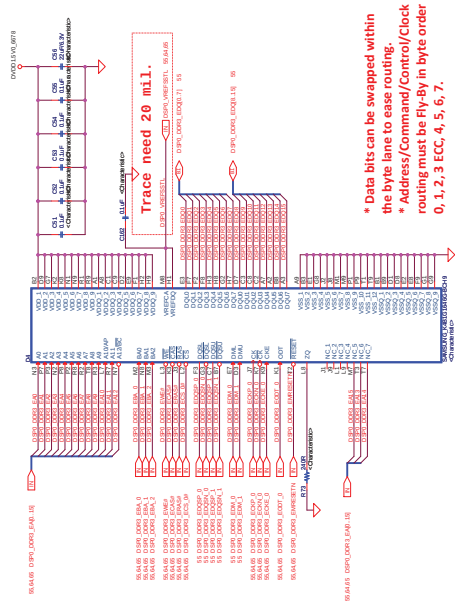

- * Data bits can be swapped within the byte lane to ease routing.
- * Address/Command/Control/Clock routing must be Fly-By in byte order 0, 1, 2, 3 ECC, 4, 5, 6, 7.

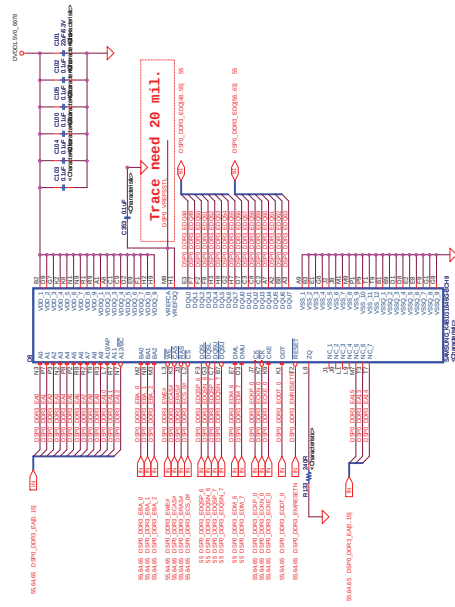