







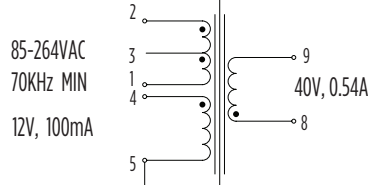

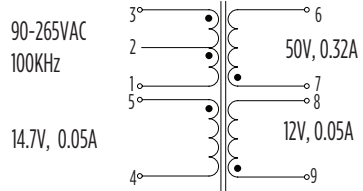
# Switching Mode Transformers

EEL12 Platforms - THT



-  **LED Lighting T8/T10 Solution**
-  **AC/DC Switching Transformers**
-  **Reinforced Insulation**
-  **3000Vrms Hi-Pot**
-  **Topology: PFC Flyback**

## Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

<b>PG1054.400NL</b> Chipset: TI UCC28810	<b>Pri. Inductance</b>	(2 - 1)	545 $\mu$ H +/- 15%	 <p><b>DM PFC FLYBACK TRANSFORMER</b></p>	
	<b>Lk. Inductance</b>	(2 - 1)	6.5 $\mu$ H MAX		
	<b>Turn Ratio</b>	(2-1):(4-5)	6.80		
		(2-1):(8-9)	2.83		
	<b>DCR</b>	(2-1)	1.20		$\Omega$ Max
		(4-5)	0.33		
		(8-9)	0.20		
<b>Hi-Pot</b>	Pri-Sec	3000	Vrms		
<b>K1 Factor</b>		2162.7			
<b>PG1054.404NL</b> Chipset: Fairchild FL7930C	<b>Pri. Inductance</b>	(2 - 1)	545 $\mu$ H +/- 15%	 <p><b>DM PFC FLYBACK TRANSFORMER</b></p>	
	<b>Lk. Inductance</b>	(2 - 1)	14.0 $\mu$ H MAX		
	<b>Turn Ratio</b>	(2-1):(4-5)	9.250		
		(2-1):(8-9)	2.846		
	<b>DCR</b>	(2-1)	1.30		$\Omega$ Max
		(4-5)	0.23		
		(8-9)	0.22		
<b>Hi-Pot</b>	Pri-Sec	3000	Vrms		
<b>K1 Factor</b>		2338.1			
<b>PG1054.500NL</b> Chipset: PI LNK406EG	<b>Pri. Inductance</b>	(2 - 1)	715 $\mu$ H +/- 15%	 <p><b>DM PFC FLYBACK TRANSFORMER</b></p>	
	<b>Lk. Inductance</b>	(2 - 1)	32.0 $\mu$ H MAX		
	<b>Turn Ratio</b>	(2-1):(4-5)	3.55		
		(2-1):(9-8)	1.77		
	<b>DCR</b>	(2-1)	1.65		$\Omega$ Max
		(4-5)	0.70		
		(9-8)	0.80		
<b>Hi-Pot</b>	Pri-Sec	3000	Vrms		
<b>K1 Factor</b>		2473.6			
<b>PG1054.501NL</b> Chipset: Intersil ISL6745A	<b>Pri. Inductance</b>	(3 - 1)	280 $\mu$ H +/- 15%	 <p><b>DM PFC FLYBACK TRANSFORMER</b></p>	
	<b>Lk. Inductance</b>	(3 - 1)	6.0 $\mu$ H MAX		
	<b>Turn Ratio</b>	(3-1):(5-4)	6.500		
		(3-1):(7-6)	1.625		
		(3-1):(9-8)	6.500		
	<b>DCR</b>	(3-1)	0.95		$\Omega$ Max
		(5-4)	0.42		
(7-6)		0.55			
(9-8)		0.16			
<b>Hi-Pot</b>	Pri-Sec	3000	Vrms		
<b>K1 Factor</b>		1709.4			

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678


Taiwan 886 3 4356768

# Switching Mode Transformers

EEL12 Platforms - THT

## Mechanicals

PG1054.XXXNL

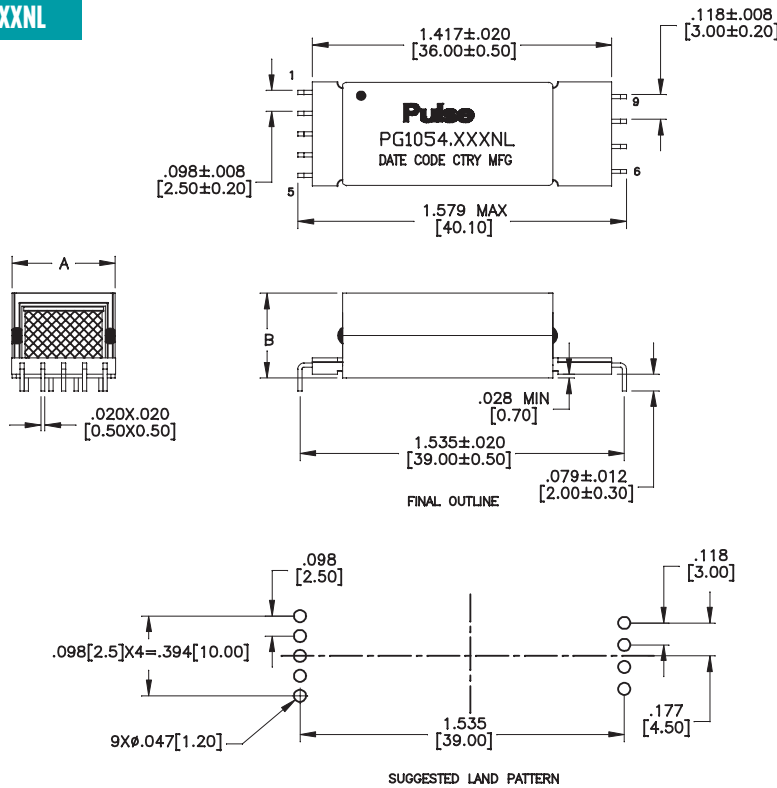

PART NO	A	B	PIN DESCRIPTION
PG1054.400NL	.512 MAX [13.00]	.413 MAX [10.50]	REMOVE PIN 6,7
PG1054.404NL	.531 MAX [13.50]	.453 MAX [11.50]	REMOVE PIN 6,7
PG1054.500NL	.512 MAX [13.00]	.413 MAX [10.50]	REMOVE PIN 6,7
PG1054.501NL	.512 MAX [13.00]	.413 MAX [10.50]	FULL PINS

### NOTES:

- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- For flyback technology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700 Gauss. To calculate the peak flux density, use the following formula:  

$$B_{pk} \text{ (Gauss)} = K1\_Factor * I_{pk}(A)$$
- In high volt-µsec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

$$\text{CoreLoss (W)} = 1.98E-07 \times (\text{Freq\_kHz})^{1.38} \times (\text{DB\_Gauss})^{2.86}$$

where DB can be calculated as:

$$\text{For Flyback Topology: } DB = K1\_Factor * 0.59I_{pk}(A)$$

- The “NL” suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the “NL” suffix, but an RoHS-compliant version is required, please contact Pulse for availability.
- Full pins is available.

## For More Information

**Pulse Worldwide Headquarters**  
12220 World Trade Drive  
San Diego, CA  
92128  
U.S.A.

Tel: 858 674 8100

**Pulse Europe**  
Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

Tel: 49 7032 7806

**Pulse China Headquarters**  
B402, Shenzhen Academy of  
Aerospace Technol-  
ogy Bldg.  
10th Kejian Road  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China  
518057

**Pulse North China**  
Room 2704/2705  
Super Ocean Finance  
Ctr.  
2067 Yan An Road  
West  
Shanghai 200336  
China

**Pulse South Asia**  
135 Joo Seng Road  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998  
Fax: 65 6287 8998

**Pulse North Asia**  
3F, No. 198  
Zhongyuan Road  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.  
Tel: 886 3 4356768  
Fax: 886 3 4356823  
(Pulse)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2011. Pulse Electronics, Inc. All rights reserved.