


WEBENCH® Design Report


Design : 1195951/246 LM3409HVMY/NOPB
LM3409HVMY/NOPB 40.0V-50.0V to 37.0V @ 2.5A

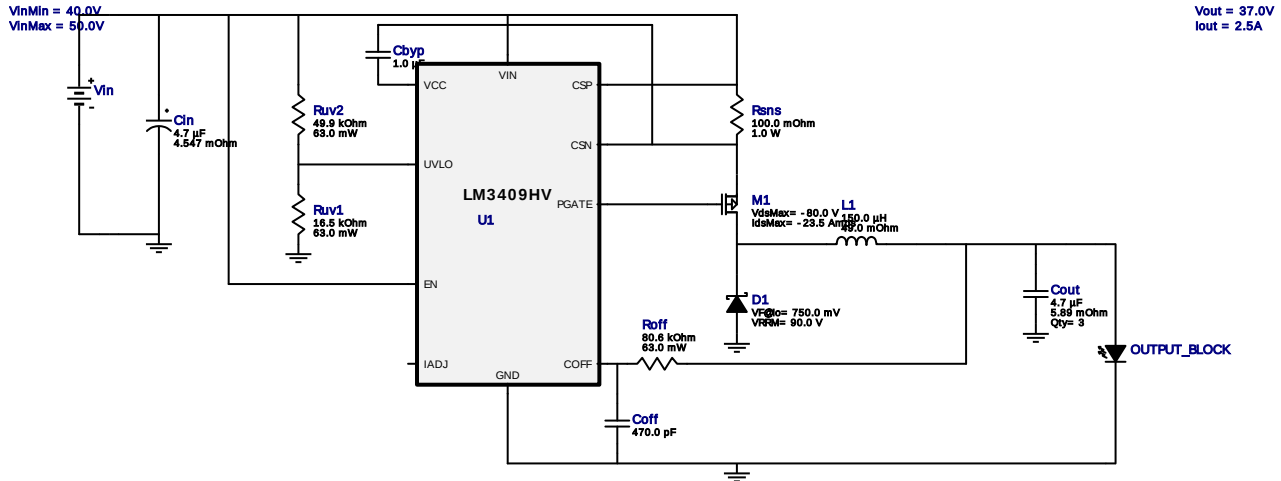


1. Bypass Capacitor Connection : WEBENCH schematic configured for the selected PFET's total gate charge (Qg). If the Qg value is > 30 nC, the Bypass Capacitor(Cbyp or CF) is connected from the VCC pin to CSN pin instead of the typically connected from VCC to Vin when Qg < 30nC.





Electrical BOM







#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
1.	Cbyp	MuRata	GRM155R61A105KE15D Series= X5R	Cap= 1.0 µF VDC= 10.0 V IRMS= 0.0 A	1	\$0.01	0402 3mm2
2.	Cin	TDK	C3225X7S2A475M Series= 285	Cap= 4.7 µF ESR= 4.547 mOhm VDC= 100.0 V IRMS= 0.0 A	1	\$0.42	1210 15mm2
3.	Coff	Yageo America	CC0805KRX7R9BB471 Series= X7R	Cap= 470.0 pF VDC= 50.0 V IRMS= 0.0 A	1	\$0.01	0805 7mm2
4.	Cout	TDK	C3225X7S2A475M200AB Series= X7R	Cap= 4.7 µF ESR= 5.89 mOhm VDC= 100.0 V IRMS= 6.774 A	3	\$0.42	1210 15mm2
5.	D1	Vishay-Semiconductor	BYS12-90-E3/TR	VF@Io= 750.0 mV VRRM= 90.0 V	1	\$0.08	SMA 37mm2
6.	D_LED	CUSTOM	CUSTOM	LED	1	NA	CUSTOM 0mm2
7.	L1	Bourns	PM2110-151K-RC	L= 150.0 µH DCR= 49.0 mOhm	1	\$1.21	















PM2110 890mm2






#	Name	Manufacturer	Part Number	Properties	Qty	Price	Footprint
8.	M1	Vishay-Siliconix	SUM110P08-11L	VdsMax= -80.0 V IdsMax= -23.5 Amps	1	\$2.27	 DDPAK 210mm2
9.	Roff	Vishay-Dale	CRCW040280K6FKED Series= CRCW..e3	Res= 80.6 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3mm2
10.	Rsns	Stackpole Electronics Inc	CSRN2010FKR100 Series= ?	Res= 100.0 mOhm Power= 1.0 W Tolerance= 1.0%	1	\$0.11	 2010 32mm2
11.	Ruv1	Vishay-Dale	CRCW040216K5FKED Series= CRCW..e3	Res= 16.5 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3mm2
12.	Ruv2	Vishay-Dale	CRCW040249K9FKED Series= CRCW..e3	Res= 49.9 kOhm Power= 63.0 mW Tolerance= 1.0%	1	\$0.01	 0402 3mm2
13.	U1	Texas Instruments	LM3409HVMY/NOPB	Switcher	1	\$0.75	 MUC10A 24mm2

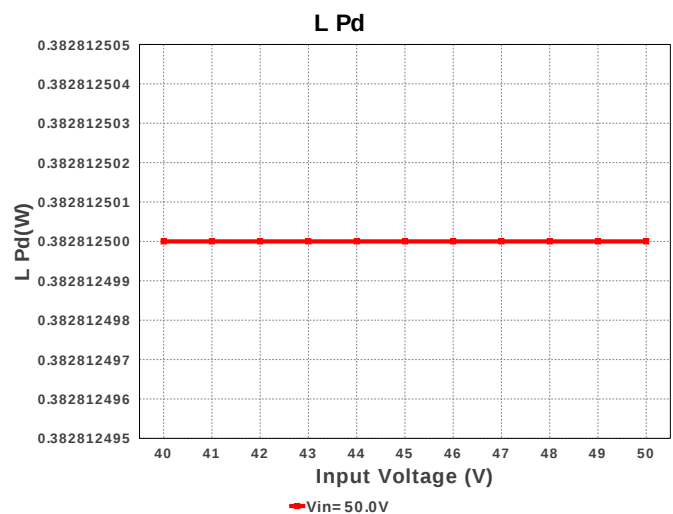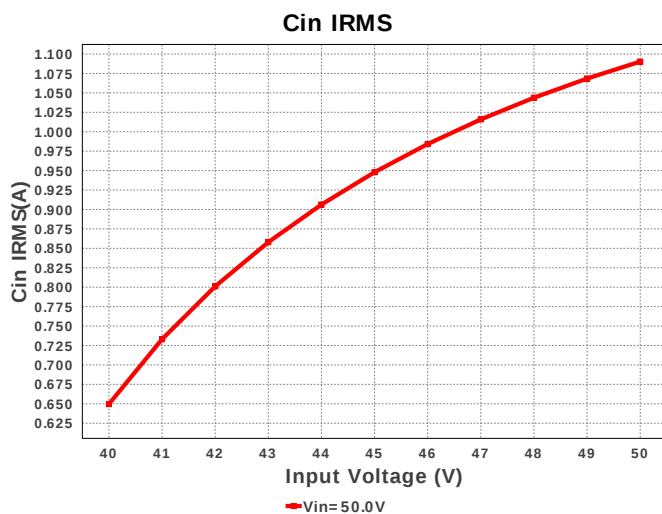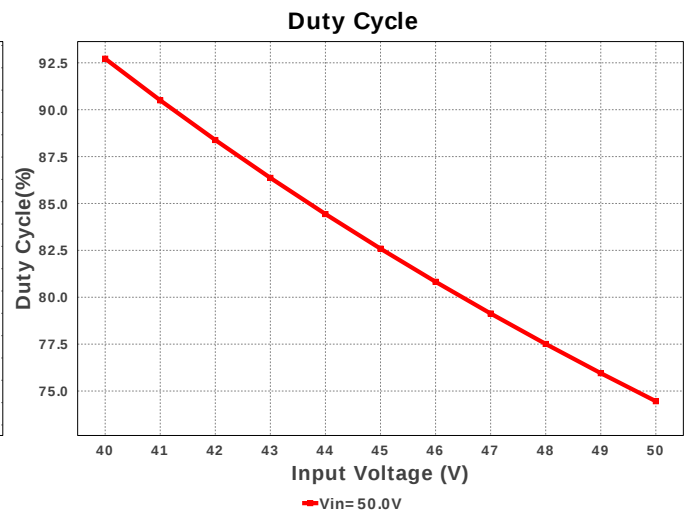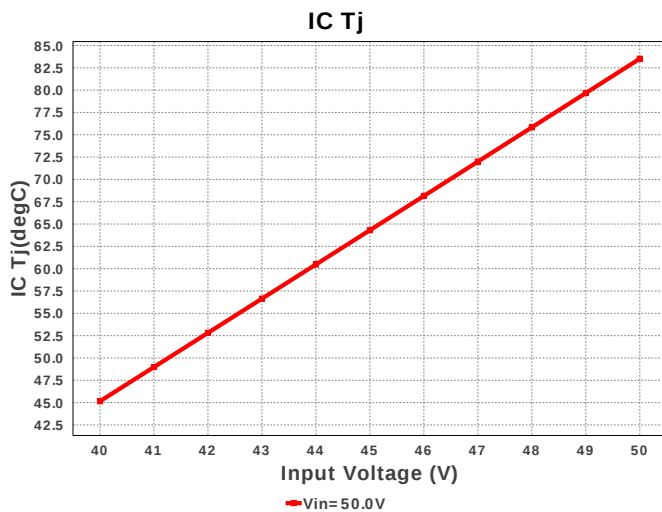

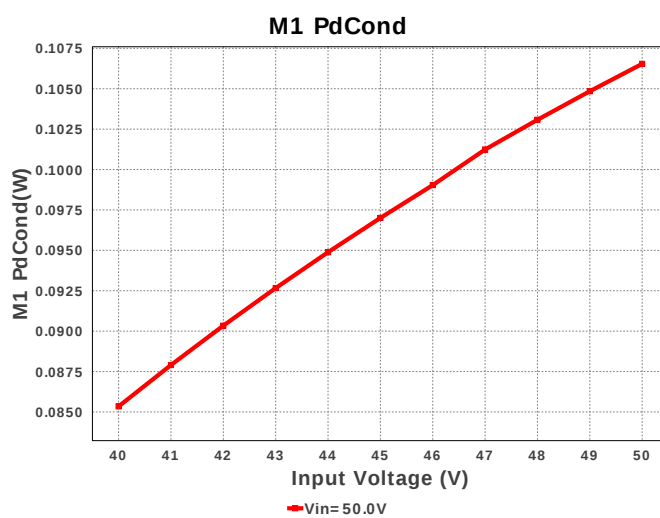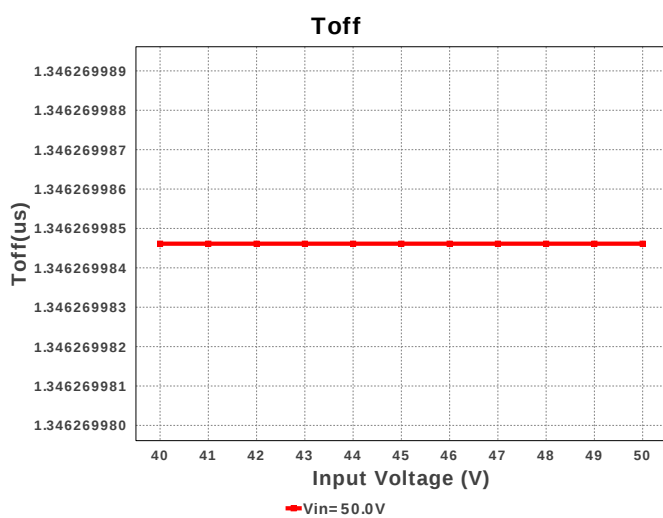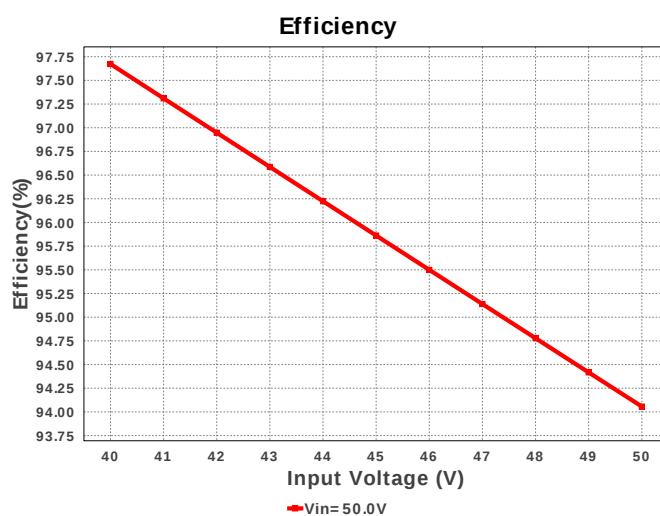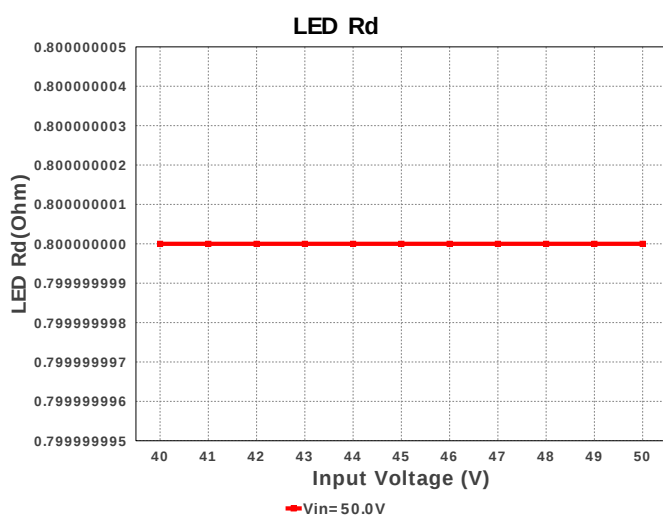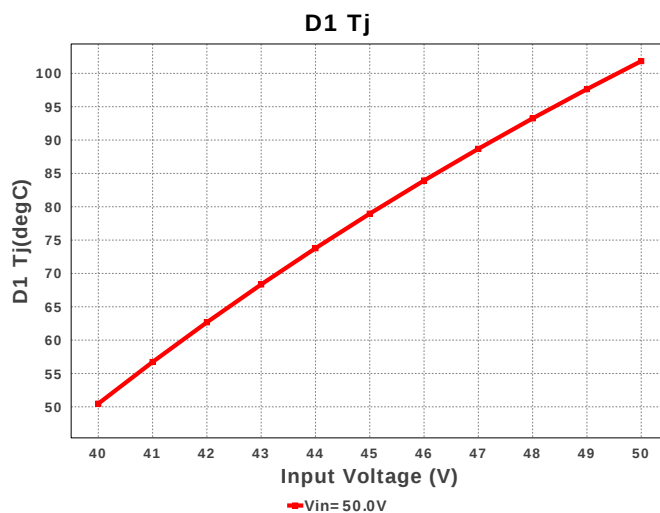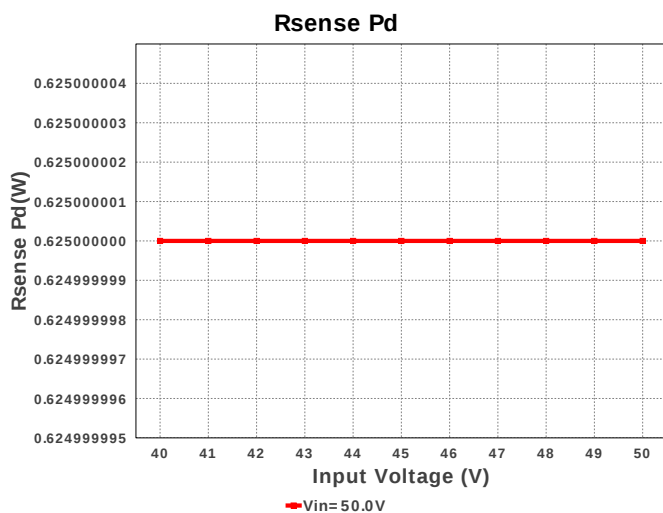

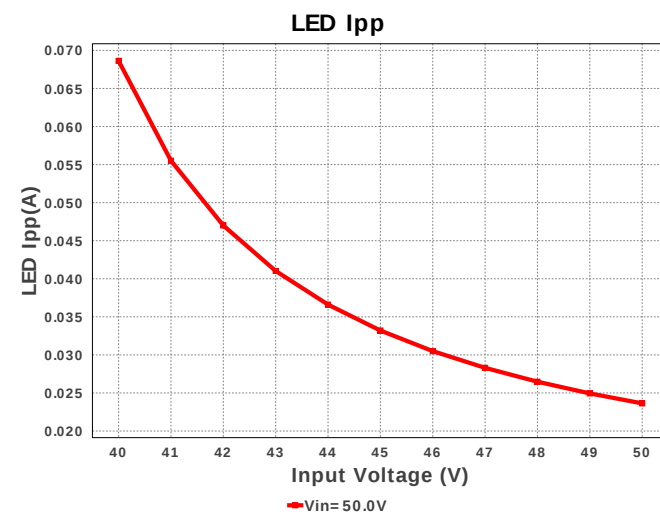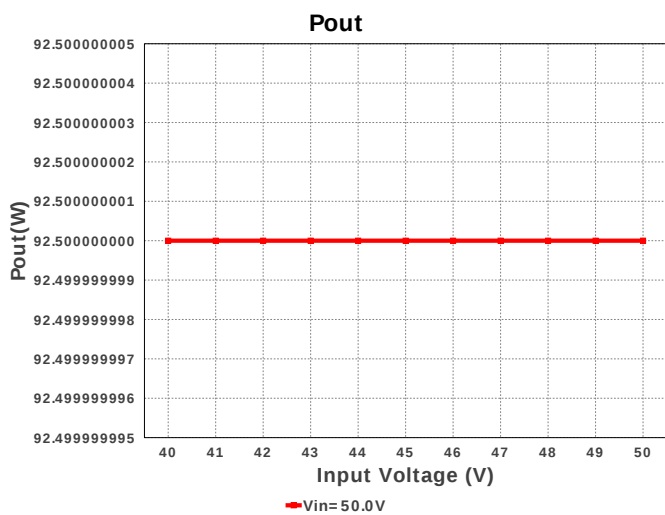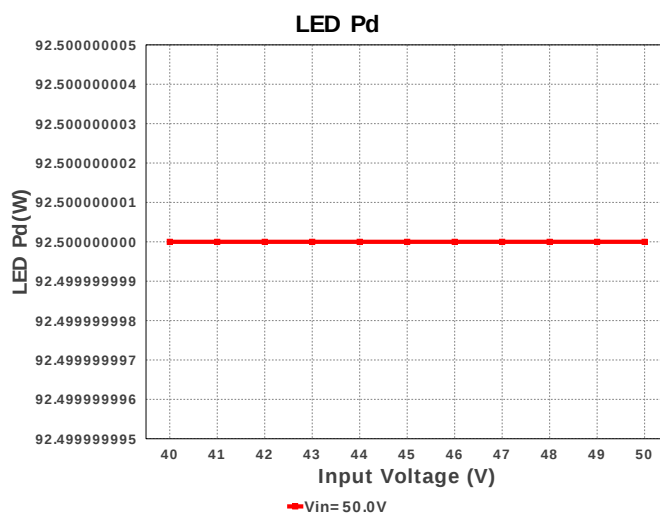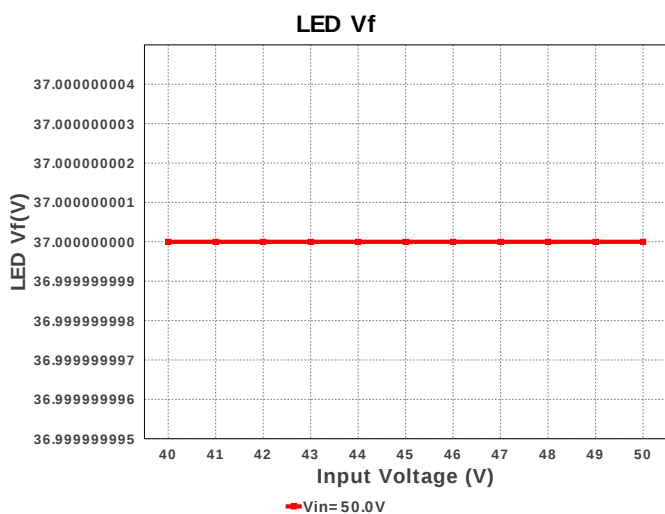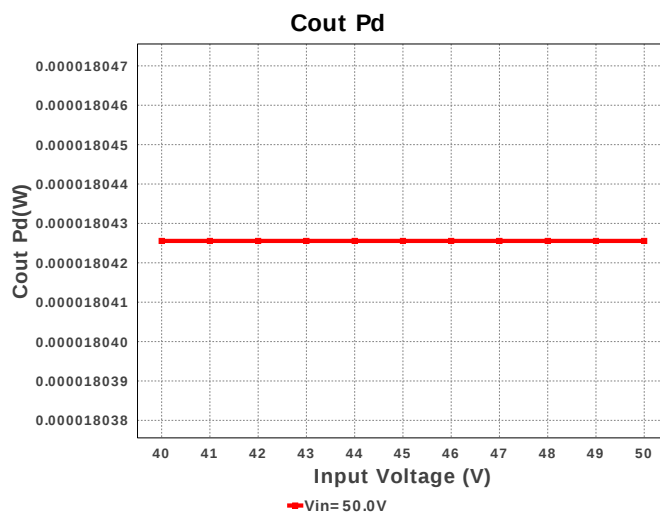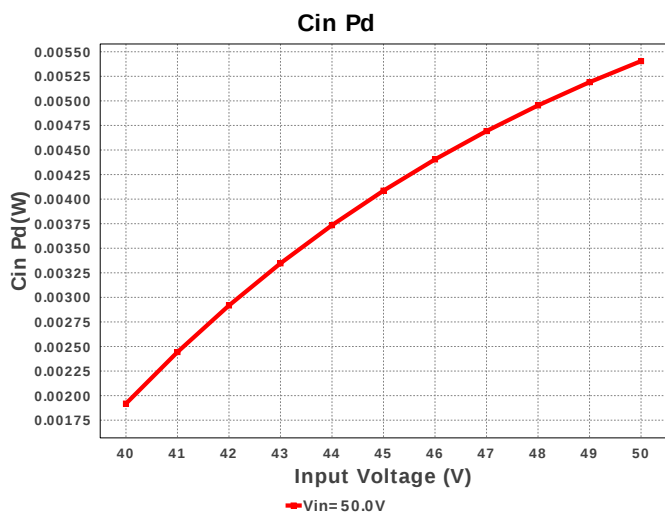

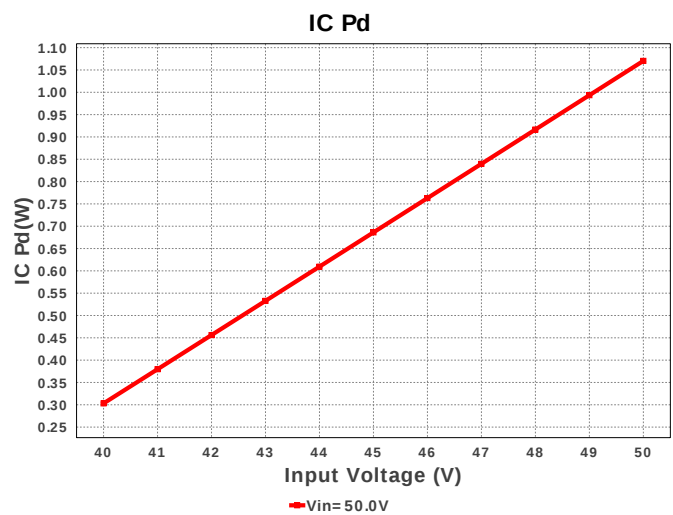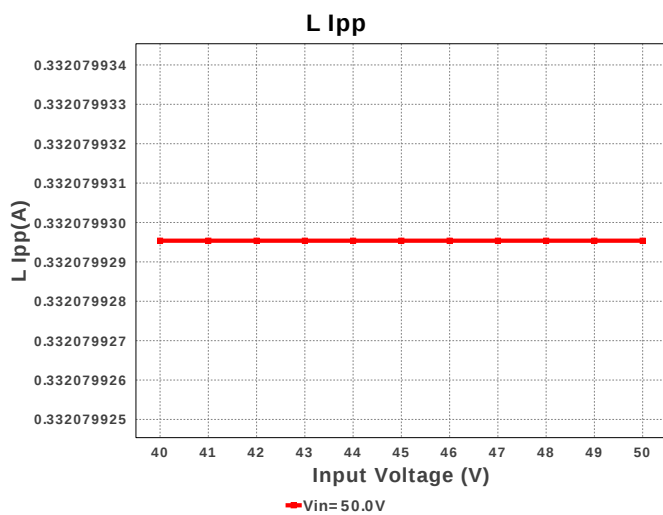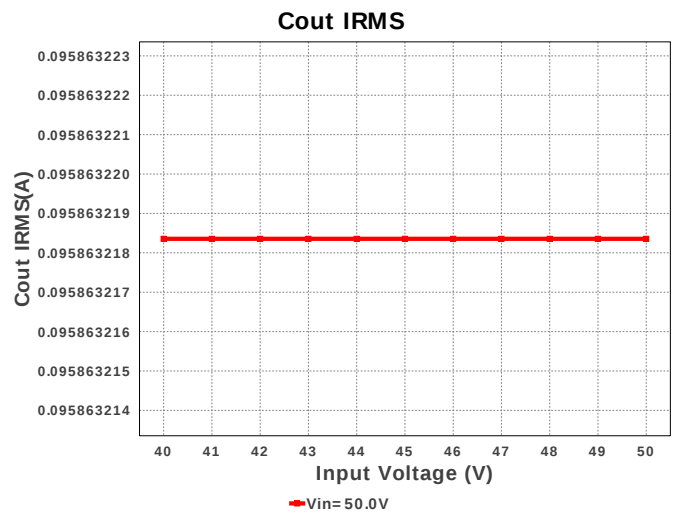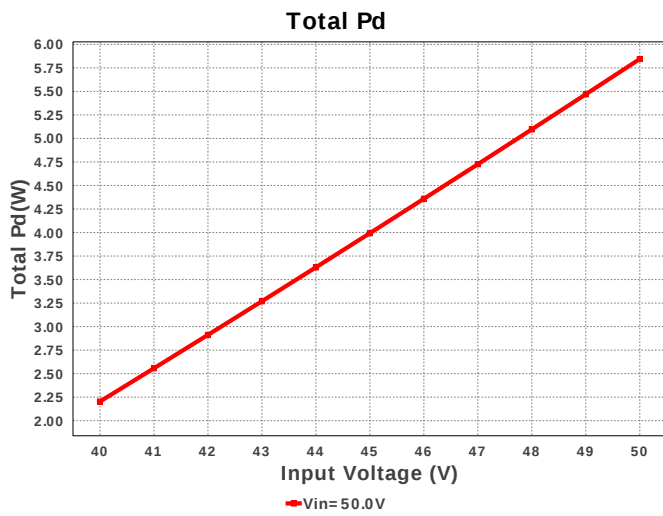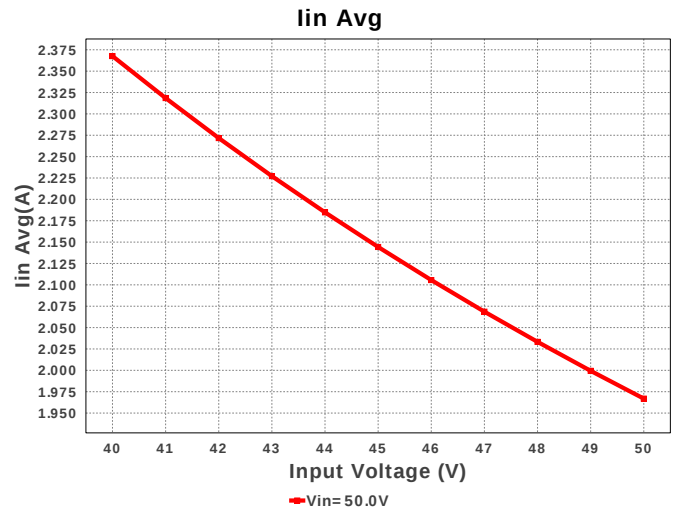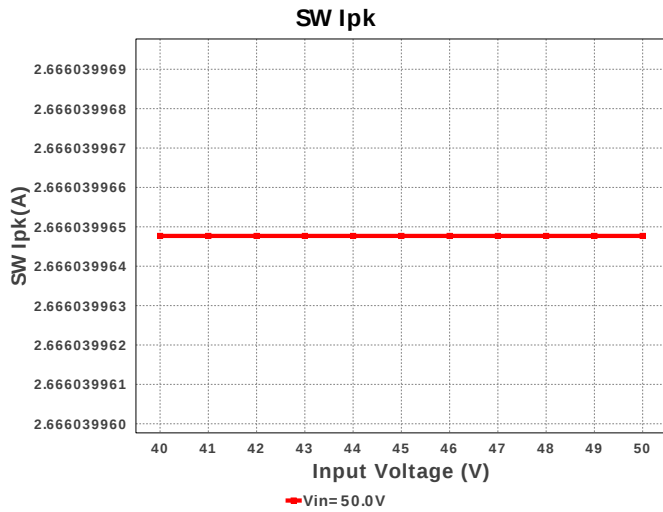

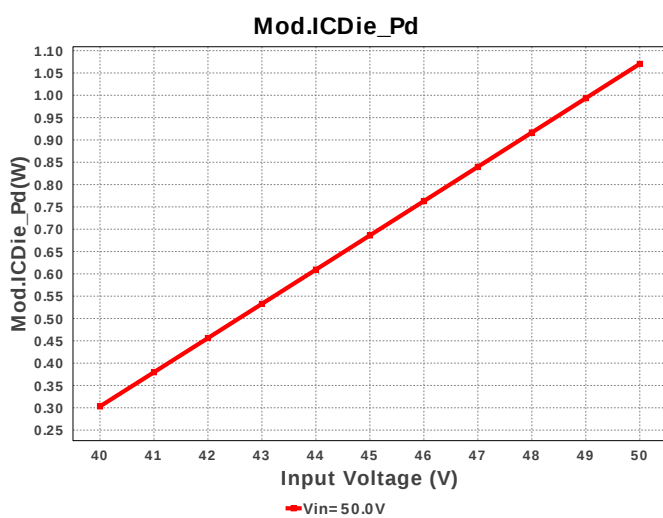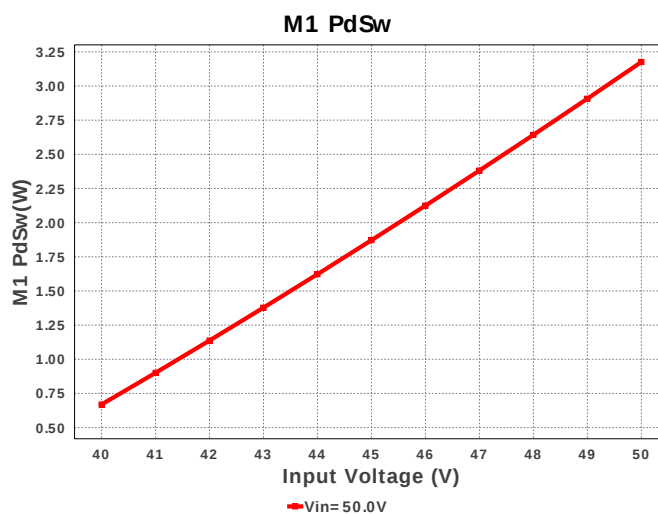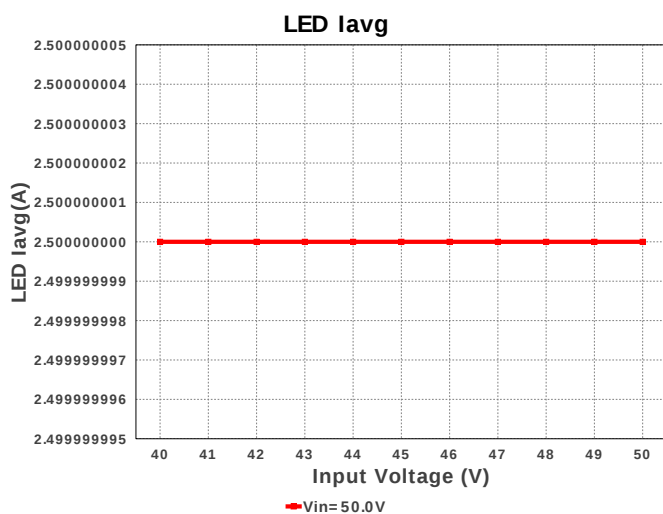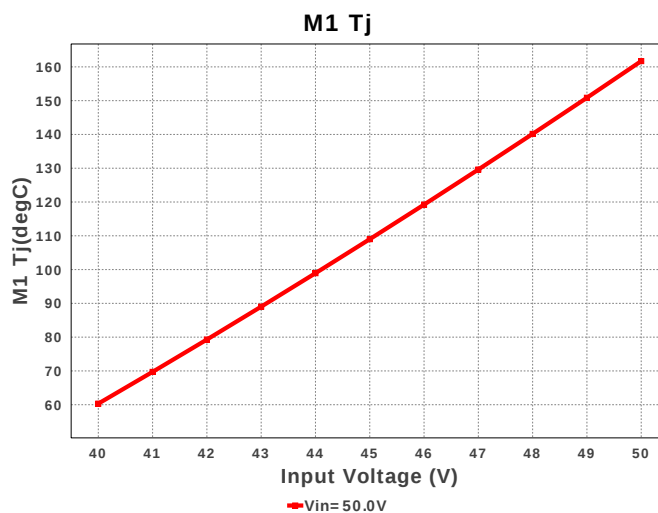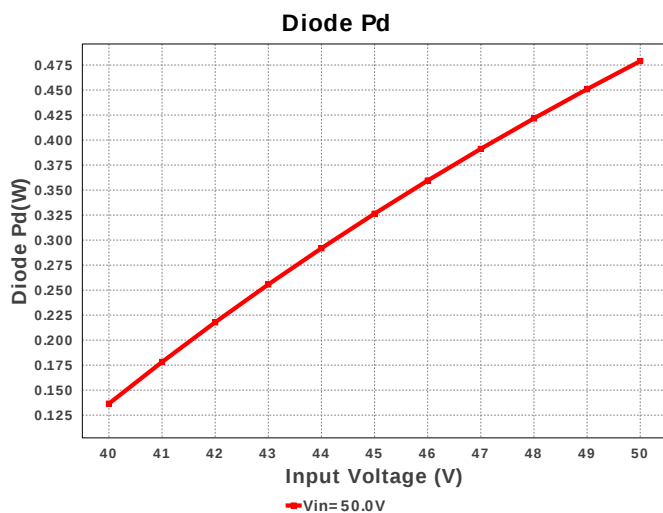

Operating Values

#	Name	Value	Category	Description
1.	Cin IRMS	1.09 A	Current	Input capacitor RMS ripple current
2.	Cout IRMS	95.863 mA	Current	Output capacitor RMS ripple current
3.	Iin Avg	1.967 A	Current	Average input current
4.	L Ipp	332.08 mA	Current	Peak-to-peak inductor ripple current
5.	LED Iavg	2.5 A	Current	LED Average Current
6.	LED Ipp	23.657 mA	Current	LED Ripple Current
7.	SW Ipk	2.666 A	Current	Peak switch current
8.	BOM Count	15	General	Total Design BOM count
9.	FootPrint	1.271 kmm2	General	Total Foot Print Area of BOM components
10.	Frequency	190.03 kHz	General	Switching frequency
11.	IC Tolerance	54.0 mV	General	IC Feedback Tolerance

#	Name	Value	Category	Description
12.	Pout	92.5 W	General	Total output power
13.	Total BOM	\$0.0	General	Total BOM Cost
14.	D1 Tj	101.844 degC	Op_Point	D1 junction temperature
15.	Vout OP	37.0 V	Op_Point	Operational Output Voltage
16.	Duty Cycle	74.455 %	Op_point	Duty cycle
17.	Efficiency	94.063 %	Op_point	Steady state efficiency
18.	IC Tj	83.458 degC	Op_point	IC junction temperature
19.	ICThetaJA	50.0 degC/W	Op_point	IC junction-to-ambient thermal resistance
20.	IOUT_OP	2.5 A	Op_point	Iout operating point
21.	LED Rd	800.0 mOhm	Op_point	LED DynamicResistance
22.	LED Vf	37.0 V	Op_point	Total LED Forward Calculated Voltage
23.	M1 Tj	161.563 degC	Op_point	MOSFET junction temperature
24.	VIN_OP	50.0 V	Op_point	Vin operating point
25.	Cin Pd	5.405 mW	Power	Input capacitor power dissipation
26.	Cout Pd	18.043 μ W	Power	Output capacitor power dissipation
27.	Diode Pd	478.96 mW	Power	Diode power dissipation
28.	IC Pd	1.069 W	Power	IC power dissipation
29.	L Pd	382.812 mW	Power	Inductor power dissipation
30.	LED Pd	92.5 W	Power	LED Power Dissipation
31.	M1 PdCond	104.784 mW	Power	M1 MOSFET conduction losses
32.	M1 PdSw	3.172 W	Power	M1 MOSFET switching losses
33.	Rsense Pd	625.0 mW	Power	LED Power Dissipation
34.	Total Pd	5.838 W	Power	Total Power Dissipation
35.	Toff	1.346 us	Unknown	Fixed Off Time

Design Inputs

#	Name	Value	Description
1.	Iout	2.5 A	Maximum Output Current
2.	Iout1	2.5 Amps	Output Current #1
3.	VinMax	50.0 V	Maximum input voltage
4.	VinMin	40.0 V	Minimum input voltage
5.	Vout	37.0 V	Output Voltage
6.	Vout1	37.0 Volt	Output Voltage #1
7.	application	LED_DRIVER	LED Application
8.	base_pn	LM3409HV	Base Product Number
9.	LED_Architect	N	LED Architect Project
10.	ledparallel	1.0	Number of LED in parallel
11.	ledpartnumber	Custom	LED Part number
12.	ledseries	1.0	Number of LED in series
13.	line_fsw	60.0	AC Line Frequency
14.	source	DC	Input Source Type
15.	Ta	30.0 degC	Ambient temperature

Design Assistance

1. Application Hints Bypass Capacitor Connection WEBENCH schematic configured for the selected PFET's total gate charge (Qg) If the Qg value is > 30 nC, the Bypass Capacitor (Cbyp or CF) is connected from the VCC pin to CSN pin instead of typically connected from VCC to Vin when Qg < 30nC. Please see the datasheet for further design guidance. <http://www.ti.com/lit/ds/symlink/LM3409HV.pdf>

2. **LM3409HV** Product Folder : <http://www.ti.com/product/lm3409hv> : contains the data sheet and other resources.

Texas Instruments' WEBENCH simulation tools attempt to recreate the performance of a substantially equivalent physical implementation of the design. Simulations are created using Texas Instruments' published specifications as well as the published specifications of other device manufacturers. While Texas Instruments does update this information periodically, this information may not be current at the time the simulation is built. Texas Instruments does not warrant the accuracy or completeness of the specifications or any information contained therein. Texas Instruments does not warrant that any designs or recommended parts will meet the specifications you entered, will be suitable for your application or fit for any particular purpose, or will operate as shown in the simulation in a physical implementation. Texas Instruments does not warrant that the designs are production worthy.

You should completely validate and test your design implementation to confirm the system functionality for your application prior to production.

Use of Texas Instruments' WEBENCH simulation tools is subject to [Texas Instruments' Site Terms and Conditions of Use](#). Prototype boards based on WEBENCH created designs are provided AS IS without warranty of any kind for evaluation and testing purposes and are subject to the terms of the [Evaluation License Agreement](#).