



Features

- Wide 4 : 1 Input Voltage Range(9~36V,18~75V)
- Remote On/Off
- Input / Output Isolation Voltage: 1.5K Vdc
- Extended Operating Temperature Range: -40°C to +85°C
- Output Short Circuit Protection:
Continuous & Auto Recovery
- Over Voltage Protection: Clamp Mode
- Shielded Metal Case with Insulated Baseplate
- Lead Free Design, RoHS Compliant
- 6 pin DIP Package with Industry-Standard Footprint
- Customer Design Available



Description

The BUB12W Series are isolated 12W DC/DC converters. Designed with highly efficiency, allow the operating temperature range of these units to be -40°C to +85°C in a 6 pin DIP package with industry-standard footprint. Further features include wide 4 : 1 input voltage range, remote on/off control, short-circuit protection and over voltage protection.

Applications

These converters are well suitable for battery operated equipment, measurement equipment, telecom, wireless network, Industry control system, everywhere where isolated, tightly regulated voltages and compact size are required.

Technical Specification

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

Model Number	Input Voltage Range	Output Voltage (Vdc)	Output Current (mA)		Input Current (mA)		Eff. ⁽²⁾ (%)	Capacitive Load, max. ⁽³⁾ (uF)
			Min. Load ⁽¹⁾	Full. Load	No Load	Full Load		
BUB12-24S0W	9~36V Nominal:24Vdc	3.3	203	2400	5.4	438	80	8260
BUB12-24S1W		5	73	2000	6.3	543	81	8800
BUB12-24S2W		12	0	1000	14.2	615	85	530
BUB12-24S3W		15	18	800	9.1	613	86	347
BUB12-24D1W		±5	33	±1000	7.5	531	83	1800
BUB12-24D2W		±12	13	±500	13.4	606	87	200
BUB12-24D3W		±15	9	±400	9.9	612	86	147
BUB12-48S0W	18~75V Nominal:48Vdc	3.3	243	2400	3.6	221	80	10550
BUB12-48S1W		5	89	2000	5.6	269	81	13720
BUB12-48S2W		12	33	1000	6.6	303	87	730
BUB12-48S3W		15	18	800	5.6	303	87	330
BUB12-48D1W		±5	33	±1000	5.3	261	84	2600
BUB12-48D2W		±12	18	±500	7	302	87	270
BUB12-48D3W		±15	9	±400	6.2	304	86	147




Input Specifications			
Input Voltage	24V nominal input		9-36Vdc
	48V nominal input		18-75Vdc
Input filter			Pi Type
Input surge voltage (100ms max.)	24V input		50Vdc
	48V input		100Vdc
Input reflected ripple current	Nominal Vin and full load		186mA _{p-p} typ.
Start up time	Nominal Vin and constant resistive load		350ms typ.
Remote ON/OFF	Converter: ON		Open or 3.5V < Vr < 12V
	Converter: OFF		Short ⁽⁴⁾ or 0V < Vr < 1.2V
Sourcing current of remote control pin	Nominal Vin		< 0.2 mA
Idle input current (at Remote OFF state)	Nominal Vin		< 3 mA
Environmental Specifications			
Operating ambient temperature	-40°C to +85°C (with derating)		
Maximum case temperature	+100°C		
Storage temperature range	-55°C to +105°C		
Relative humidity	5% to 95% RH		
Temperature coefficient	±0.02% / °C max.		
Output Specifications			
Output power	12 Watts max.		
Voltage accuracy	Full load and nominal Vin		±1%
Minimum load	See table		
Line regulation	LL to HL at full load		±0.5%
Load Regulation	25% load to full load	Single	±0.5%
	Balanced load	Dual	±0.5%
	Unbalanced load 25% to 100% full load		±5%
Ripple and Noise	20MHz bandwidth		70mV _{p-p} max.
Over voltage protection (Zener Diode Clamp)	3.3V _{out} models		3.9V
	5V _{out} models		6.2V
	12V _{out} models		15V
	15V _{out} models		18V
Capacitive load	See table		
Over load protection	% of full load at nominal input		150% typ.
Short circuit protection	Continuous, automatic recovery		
Transient response settling time	50% load step change		500Us typ.
Transient response over shoot	di/dt=0.8A/μs		≤ ±5% of Vo




General Specifications		
Efficiency	Nominal input	See table
Isolation voltage	Input to output	1500Vdc
Isolation resistance	500Vdc	10^9 Ohms min.
Isolation capacitance		220pF typ.
Switching frequency		300kHz typ.
Reliability, calculated MTBF		1.96×10^6 Hrs
Physical Specifications		
Case material		Nickel-coated copper
Base material		Non-conductive black plastic
Potting material		Silicon rubber (UL94V-0)
Dimensions		$2 \times 1 \times 0.4$ Inch
		($50.8 \times 25.4 \times 10.2$ mm)
Weight		30g (1.24oz) typ.


BUB12W Series
Power Derating Curve(5)

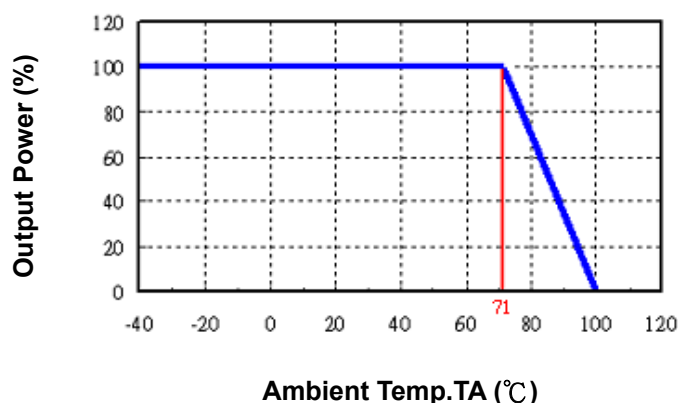

BUB12-48S1W
Input voltage vs. Efficiency

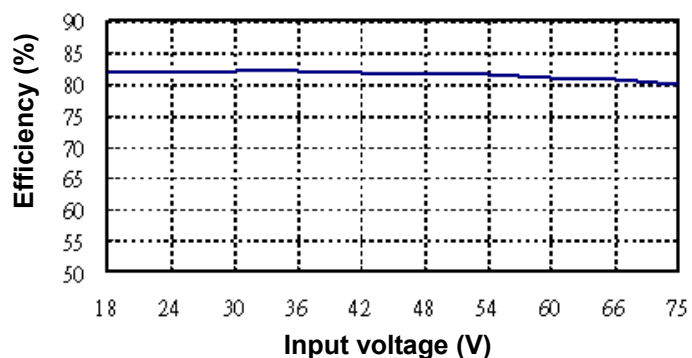

BUB12-48S1W
Output Current vs. Efficiency

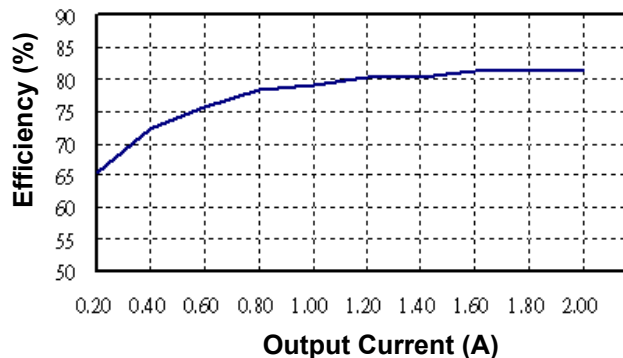





BUB12-48S1W

BUB12-48S1W

Transient Response at 50%~100% Max Load

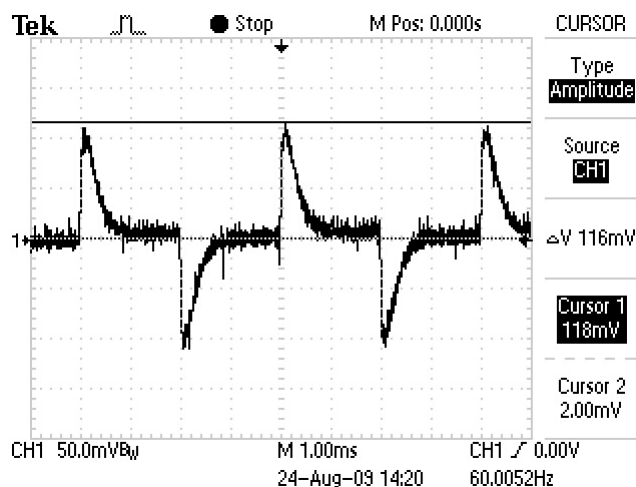


Loop Gain & Phase at Vi=48V, Full Load

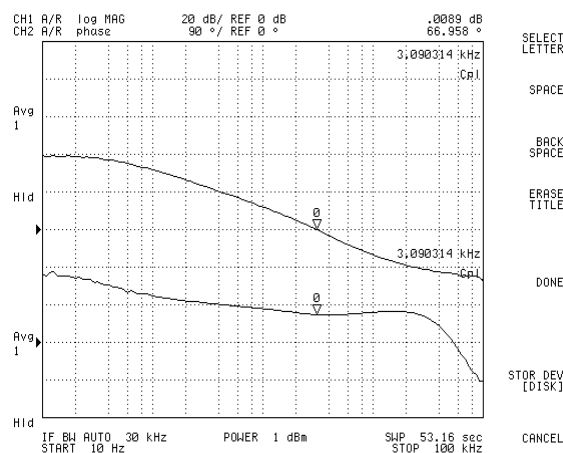

Note

1. Io below this value will not damage these converters, however, they may not meet all listed specifications.
2. Typical value, tested at nominal input and full load.
3. For each output.
4. Short to -Vin (Pin 2).
5. Based on BUB12-48S1W.

Mechanical Dimensions

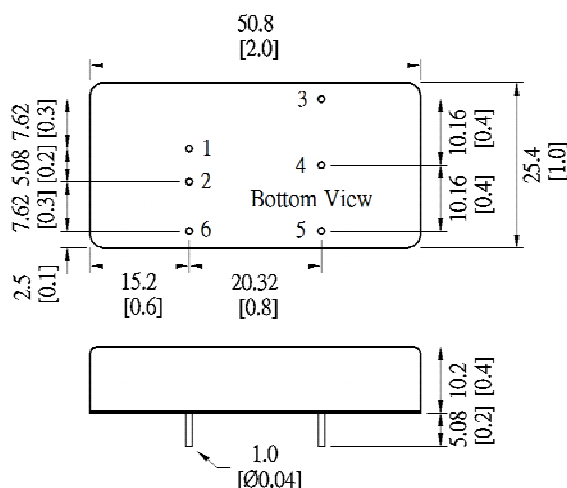

Unit: mm [inch]
Tolerance: ± 0.5 [0.02]

Pin Assignment

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No pin	Common
5	-Vout	-Vout
6	Remote On/Off (optional)	Remote On/Off (optional)

Specifications subject to change without notice.